

Building Entrances

Doorways

Pedestrian Areas

Walkways

Building Accent



BL-126



BL-125



BL-127-UD

Specifications



Certifications

ETL and CETL listed for wet location and meets IP65 standard, dust-tight and water-jet proof.

Lamp/Ballast Housing

The housing is constructed of extruded aluminum and heavy wall aluminum castings.

Lens

The lens shall be clear tempered safety glass, sealed to the housing with high temperature silicone.

Lens Frame

Heavy duty cast aluminum lens frame is supplied as standard. Fastened to housing with four 1/4-20 stainless steel Allen cap screws.

Reflectors

Spun aluminum highly specular Alzak™ finish for either NEMA type 2 spot (SPT) or NEMA type 3 flood (FLD) distributions. Fluorescent flood reflector for up to 42W CFT lamps.

Lamp Holder

Porcelain 4kv pulse rated medium base for HID and Incandescent lamp sources.

Mounting Details

Pendant mounting detail — supported by a 5/8" diameter aluminum pipe (specify length) with hang straight bracket (maximum 30° slope) and canopy for mounting to 4" octagon box. Mounting hardware by others.

Surface mounting detail — attached to ceiling through two 1/4" holes at 180° with 5-1/2" bolt circle. Mounting hardware by others.

Wall mounting detail — Cast wall plate slips over the top lip of mounting plate and is secured with two 1/4-20 set screws. The wall mounting plate is attached to wall through four 1/2" holes, 6" high by 4" wide to mount over 4" octagon box. Mounting hardware by others.

See Installation Sheet For More Details

Finish

BK-BZ-WH-GR-GY-NA baked enamel paint standard. Powder coat and custom colors available on request.

PROJECT
FIXTURE TYPE
CATALOG#

2930 South Fairview Street
 Santa Ana, CA 92704
 Phone: 714 668 3660
 Fax: 714 668 1107
 sales@allscope.net
 http://www.allighting.com

BL-125/126/127

natural aluminum


bronze

gray

green

white

black

 Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org

Product Order Guide

Series	Max Watts	Lamp Type	Voltage ¹	Finish ¹	Options
BL-125	18 CFQ	CFQ ²	120	BK Black	P ³ Specify Pendant Length
BL-126	70 MH	T6	208	BZ Bronze	SPT Nema 1 (E17 & T6)
	70 MH	PAR38	240	WH White	FLD Nema 3 (E17 & T6)
	70 MH	E17	277	GR Green	RB Remote Ballast
	70 HPS	E17		NA Natural Aluminum	SPT Spot T6/E17
	42 CFT	CFT ²		GY Gray	FLD Flood T6/E17
				CC Custom Color	MFLD Medium Flood T6/E17
BL-127	18 CFQ	CFQ ²			D Downlight
	70MH	PAR38			UD Up/Downlight
	70MH	E17			U Uplight
	70HPS	E17			SPT Nema 1 (E17 & T6)
	42CFT	CFT ²			FLD Nema 3 (E17 & T6)
	70 MH	T6			RB Remote Ballast
	Titan25WW	CUS3 ⁴	120/277	Beam 25° Warm White (3050K)	SPT Spot T6/E17
	Titan25CW	CUS3 ⁴	120/277	Beam 25° Cool (Daylight) White (4700K)	FLD Flood T6/E17
	Titan25FIX	CUS3 ⁴	120/277	Beam 25° Fixed Color Red, Green, Blue, Amber	MFLD Medium Flood T6/E17


1 Consult factory for other colors and voltages
 3 BL-125 only

2 CF = single biax, CFQ = double biax, CFT = triple biax
 4 The CUS3 is a 25W Titan led from Lamina and work in BL-125, BL-126 and BL-127


Example: BL-125-13CF-120-BK-P30"

Luminaire Dimensions


Luminaire	A		B		C		D		Weight	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	lbs.	kg
BL-125	8.00	203	12.75	324	XX.XX	XX	n/a	n/a	6.2	2.8
BL-126	8.00	203	12.75	324	n/a	n/a	n/a	n/a	10.6	4.8
BL-127-D	8.00	203	12.75	324	10.00	254	13.75	349	11.5	5.2
BL-127-UD	8.00	203	18.50	470	10.00	254	13.75	349	20.0	9.0

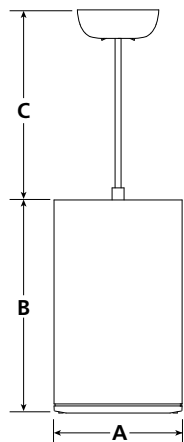


BL-125



BL-126



BL-127-D

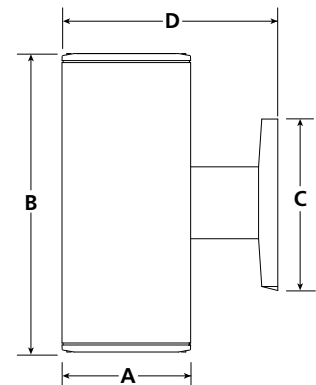

BL-127-UD