

Restricted Depth Applications

Interior Applications


Landscape Areas

Building Accent

Pedestrian Areas

Driveway Marker

Sign Lighting

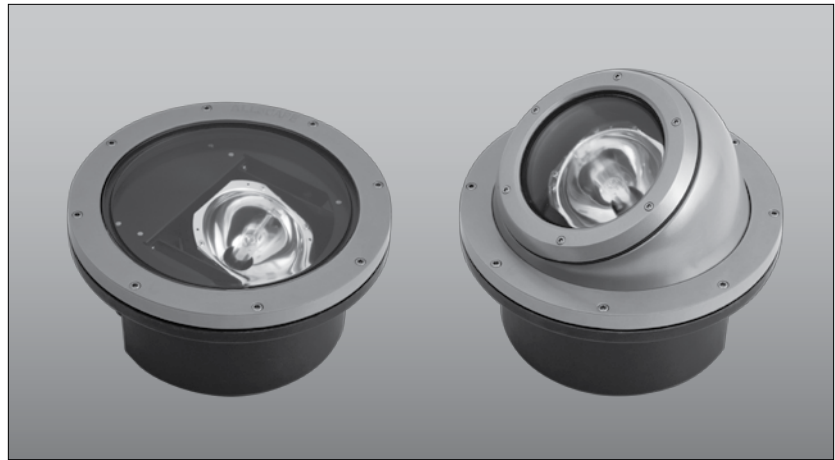

SL-42

SL-42-PH

Specifications



Certifications

ETL and CETL listed for wet location, direct burial, concrete pour and is also listed for indoor usage. Certified to IP65 and IP67 to ensure protection against the harshest environments. IEC compliant versions available, consult factory.

Lamp/Ballast Housing

Compression molded Rhinolite™ composite material, structurally reinforced with glass fibers. Superior resistance to ultraviolet degradation and corrosion resistant in harsh environments.

Splice Compartment

Supplied with two 3/4" NPT conduit entrances. Connection to ballast compartment by way of anti-wicking chamber. Sealed with gasketed die cast aluminum cover plate. Suitable for through wiring.

Lens

Standard 7/16" clear tempered flat borosilicate glass (F) or ADA anti-slip and walkover clear tempered flat borosilicate glass (ADA). Flat lenses will withstand loads up to 200 PSI. Sealed to housing with high temperature injection molded silicone gasket. Optional linear and radial spread lenses also available.

Lens Frame

Heavy duty die cast bronze lens frame is supplied as standard. Fastened to housing with eight captive 1/4-20 stainless steel allen cap screws.

Reflectors

Spun aluminum highly specular Alzak™ finish for either NEMA type 1, or 2 spot (SPT) or NEMA type 3 or 5 flood (FLD) distributions. Field adjustable up to 25° tilt and +/- 45° horizontal rotation.

Lamp Holder

Porcelain 4kv pulse rated for HID lamp sources.

Options

Cast aluminum Convex Rock Guard (CR), Directional Shield (DS), and Driveway Marker (DM). Internal Hex Cell Louver (HL), Glass Color Filter (GF), Grout Mask (GM), Debris Cover (DC), Die cast bronze Port Hole (PH).

Finish

Housing Black (BK). Options can be painted in standard or custom colors.

Safety

Caution: Care should be taken when specifying fixtures for use in pedestrian walkways to avoid problems that may be caused by high lens temperatures. Consult factory for more information.

Warning

Caution: Care should be taken not to install in-ground fixtures in areas where water can stand for prolonged periods of time. Sufficient drainage must be provided to avoid problems. Consult factory for more information.

PROJECT
FIXTURE TYPE
CATALOG#



Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org

Product Order Guide

Series	Max Watts	Lamp Type	Voltage ⁸	Optics	Options Lens	Finish ⁹	Options	
SL-42	Fluorescent 42max ²	CFT	120 208 240	FL ¹	Fluorescent F ¹ ADA ¹ LS ¹ RS ¹	Clear Flat ADA Walkover Linear Spread Radial Spread	BK ⁵ Black BZ ⁵ Bronze WH ⁵ White GR ⁵ Green NA ⁵ Natural Aluminum GY ⁵ Gray CC ⁵ Custom Color	DM ¹ Driveway Marker ^{4,7} CR ¹ Convex Rockguard ⁷ DS ¹ Directional Shield ⁷ PH ⁶ Porthole HL Hex Cell Louver GF Glass Color Filter LFSS Stainless Steel Lens GM Grout Mask IGS ^{1,11} Internal Glare Shield HPBB Cool Lens
	Metal Halide		277	SPT ¹ Spot NFLD ¹ Flood MFLD ¹ Flood				
	22MH	BT5						
	20MH	T4						
	39MH	T4						
	39MH	T6						
	20MH	HID-MR16 ¹⁰						
	39MHmax	Par20 ¹⁰						
	39MHmax	R111 ¹⁰						

THESE SELECTIONS PORTHOLE ONLY

39MH ³	Par20	PHSPT Porthole Spot ³
70MH ³	T6	PHFLD Porthole Flood ³
70MH ³	T4	PHFL Porthole Fluorescent ³
70MH ³	Par30	
70MH ³	R111	

Incandescent


75max MR16¹⁰

LED¹²

1X5WLED CUS 120 10,30,45

White (WW - 3050K, DW - 4700K)

- ¹ These selections are not available with the PH Porthole option.
- ² 26 CFT max for Porthole.
- ³ Porthole Only.
- ⁴ The DM Driveway Marker is limited to MR16 and HID-MR16 flood lamps.
- ⁵ Powder coat paint standard.
- ⁶ The PH Porthole option is supplied as standard in sandblasted bronze.
- ⁷ These options are supplied in heavy wall cast aluminum with painted powder coat finish.
- ⁸ Consult factory for other voltages.
- ⁹ Consult factory for other finishes.
- ¹⁰ Does not require internal optics.
- ¹¹ The IGS works with the T6, T4 and BT5 lamp types only.
- ¹² The CUS version uses a 5W Atlas from Lamina.

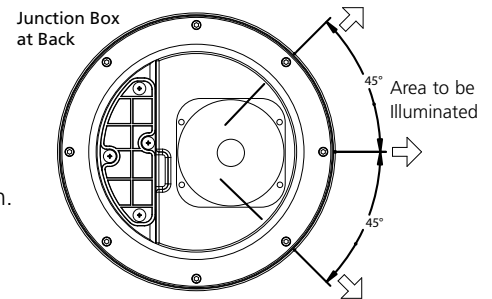

SL-42 Aiming Direction

Note: CF=single biax, CFQ = double biax, CFT = triple biax

Example: SL-42-39MH-T6-277-SPT-F-DS-BK

Luminaire Dimensions

Luminaire	A		B		C		D		Weight	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	lbs.	kg
SL-42-F	12.25	311	0.80	20	5.10	130	N/A	N/A	15	6.8
SL-42-PH	12.25	311	0.80	20	5.10	130	5.50	140	22	10.0
SL-42-DM	14.30	363	0.80	20	5.10	130	2.50	64	23	10.4
SL-42-CR	12.25	311	0.80	20	5.10	130	1.20	30	16	7.3
SL-42-DS	12.25	311	0.80	20	5.10	130	4.20	107	17	7.7

